


HANTS® FIRE PROTECTION

Valvula OS&Y Tipo Ranurado UL

HGO-200GG

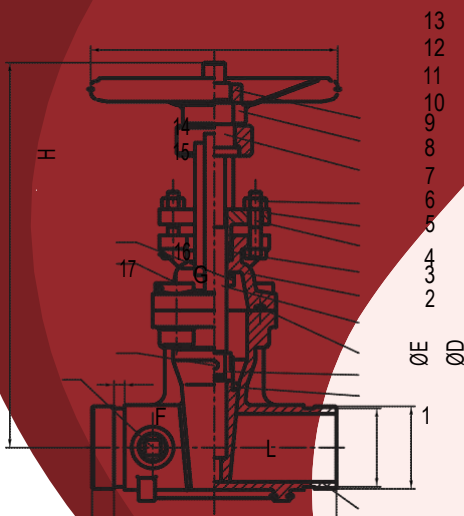

HGO-200GG

Estandar de la Valvula:
Conforms to AWWAC515

Trabajo de Presion:
200PSI

Extremos Ranurados:
ANSI B16.1 Class125
ANSI B16.42 Class150
EN1092-2 PN16

Tamaños: 2 1/2"(DN65) to 12"(DN300)

| No. | Parts Name | Material |
|-----|-----------------------|-------------------|
| 1 | Body | Ductile Iron |
| 2 | Disc | Ductile Iron+EPDM |
| 3 | Connecting Part | ASTM A148 |
| 4 | Sealing Pad | EPDM |
| 5 | Stem | SS304 |
| 6 | Cap | Ductile Iron |
| 7 | Sealing Kits | PTFE |
| 8 | Bolt | Steel |
| 9 | Platen | Ductile Iron |
| 10 | Nut | SS304 |
| 11 | Rotating Nut | ASTM B148 |
| 12 | Handwheel | ASTM A1045 |
| 13 | Lock Net | ASTM A1045 |
| 14 | Flat Key | Steel |
| 15 | Countersunk Head Bolt | Steel |
| 16 | Cylinder Pin | Steel |
| 17 | Plug | Cast Bronze |

| Size(mm) | 2" | 2.5" | 3" | 4" | 5" | 6" | 8" | 10" | 12" |
|----------|------|------|------|-------|-------|-------|-------|-------|-------|
| DN | 50 | 65 | 80 | 100 | 125 | 150 | 200 | 250 | 300 |
| L | 178 | 190 | 203 | 229 | 254 | 267 | 292 | 330 | 356 |
| H | 280 | 310 | 370 | 428 | 532 | 590 | 735 | 908 | 1150 |
| øA | 180 | 220 | 250 | 280 | 300 | 350 | 380 | 450 | 450 |
| øD | 60.3 | 76.1 | 88.9 | 114.3 | 141.3 | 168.3 | 219.1 | 273 | 323.9 |
| øE | 57.2 | 72.3 | 84.9 | 110.1 | 137 | 163.9 | 214.4 | 268.3 | 318.3 |
| F | 15.9 | 15.9 | 15.9 | 15.9 | 15.9 | 15.9 | 19 | 19 | 19 |
| G | 7.9 | 7.9 | 7.9 | 9.5 | 9.5 | 9.5 | 11.1 | 12.7 | 12.7 |